


2. 4G Air Mouse & Fidelity voice Input

Product icon

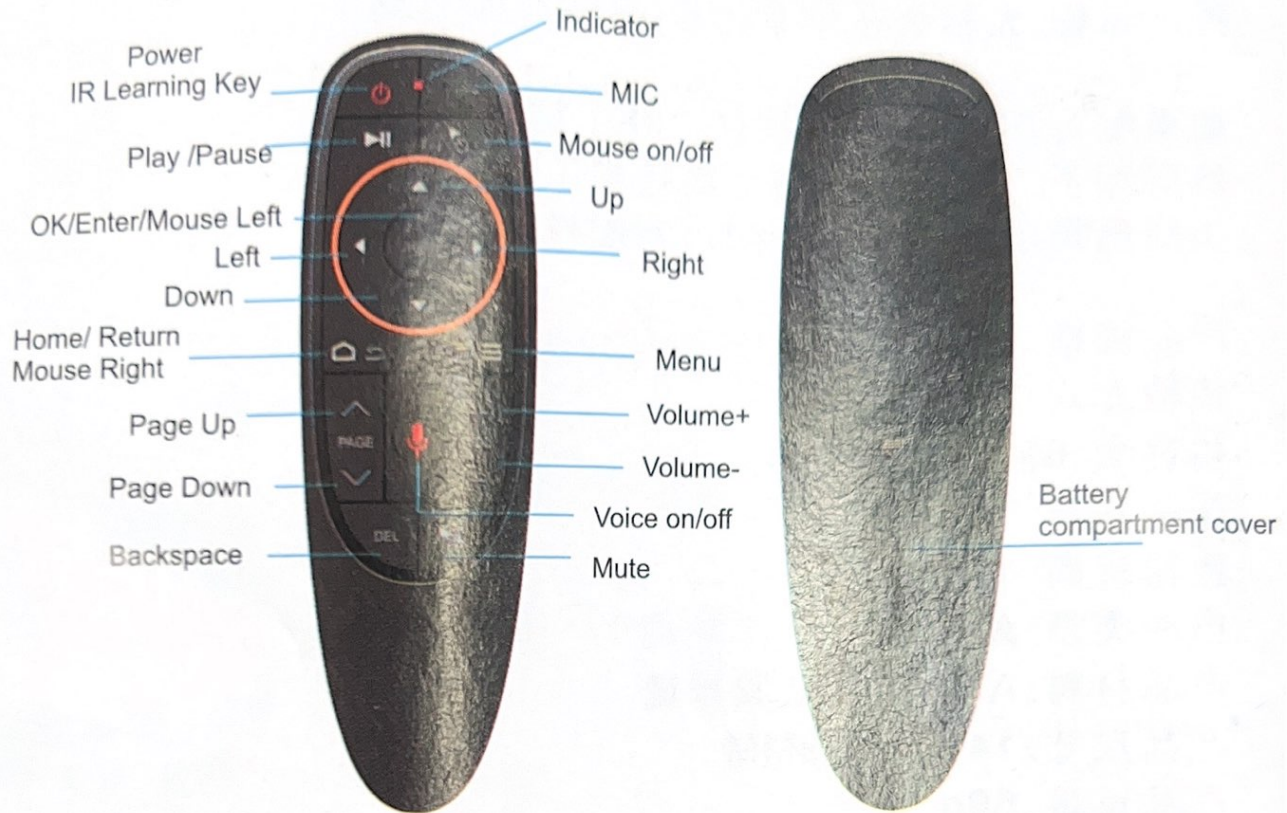

Thank you for using the product of our company!

This is a wireless air mouse with built-in axis gyroscope and gravity acceleration sensor and fidelity voice input; it can perform the functions of a traditional remote control, computer mouse, and gaming motion controller on android platform. Plug and play micro receiver is compatible with personal computer, projector, TV box, Home Theater Personal Computer etc.

Holding air mouse and rotating your wrist is converted into a movement of a cursor across the screen and it allows you to control your computer, projector and other entertainment equipment from a distance

Ergonomics of air mouse will replace stationary computer mouse and infrared button remote control giving you convenience to manage your computer and television set from a position which is most comfortable for you.

IR Learning(take the example of learning "power" button)

1. Keep pressing Power"button.
The air mouse enters IR learning mode when the LED flashes slowly.
2. Press the "power" button when you aim the IR transmitter with air mouse.
Air mouse receives the code successfully if LED light.
3. LED flashes slowly means that Air mouse has finished learning.
4. Data will be saved automatically and the product will exit learning mode.
5. Press "Power"+"OK" to clean the code up.

Air Mouse has 3 levels of cursor speed.

From slow to fast:

Press and hold "ok" and "Volume+" buttons.






The speed adjusts one level when LED light on.

From fast to slow:

Press and hold "ok" and "Volume-" buttons.

The speed adjusts one level when LED light on.

Function Keys:

-  **Home:** Go back to the home;
-  **Return:** Go back to previous screen;
-  **OK:** Confirm action or insert cursor;
-  **Cursor Locking:** Press to lock the air mouse, press again to unlock;
-  **Play/Pause:** Multimedia play/pause.

Voice Switch:

Press and hold "voice Switch" to turn on voice channel.

Release the key to turn off voice channel.

Low battery reminder:

The red light flashes slowly when the AAA battery power of the product is lower than 2v.

It means that the battery need to be replaced at this time.

Sensor Calibration

Automatic calibration:

The changes of voltage and temperature may make the cursor drifts.

In this case, put the mouse flat on the desk and remain still.

You can complete calibration by pressing any key

to wake it up when it is in hibernation mode.

How to Use

For initial use, plug a USB receiver into the USB port of device and wait for 20-60 seconds to install driver of USB receiver. Move the mouse, the mouse cursor can move on the screen means that pairing is successful.

If it is unsuccessful, press and hold "OK" and "Home" buttons, LED light begin to flash. Pairing is successful when LED light stop flashing.

Product specifications

Transmission method: 2.4G RF wireless

Sensors: 6 axis Gyroscope

Number of keys: 17

Range: >10m

Battery Type: AAA*2

Material: ABS Plastic and silicone

Size: 143*45*29MM

Weight: 50g

Note:

1. Non-professional are prohibited to use the test mode of the product. Under normal use, re-install the battery to restore it If red light always lighting.
2. IR Learning only for "power key."
3. This product is divided into gyroscope version and no gyroscope version,

Gyroscope version: Swing your wrist to control the direction and movement of the mouse pointer!

Gyroscope-free version: Move the mouse pointer by pressing "up", "down", "left" and "right" buttons on a virtual mouse.