



Ease Life

Ease Life User Manual

Wi-Fi Smart Camera

V1-2305

Download App

Scan the QR code below to download the latest software APP, or directly search for "Ease Life" in the App Store and Google Play to download



Ease Life




Scan to download

Note: iPhone requires iOS 10.0 or higher, Android phone requires Android 5.0 or higher


Account Login

1. Enter your account and password, click the "Login" button
2. If it is the first time to use Ease Life, please register an account first
3. You can also log in with Facebook and Apple accounts directly

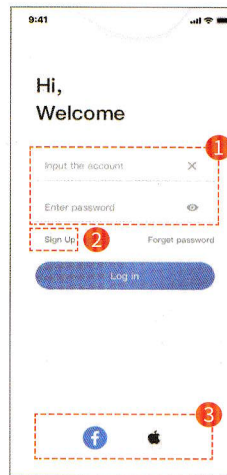

Add Device By AP Hotspot


1. Choose **"Add device by AP hotspot"**
2. Click **"Go to Phone Settings"**, connect to the Wi-Fi starting with "CAM_AP", and then back to Ease Life

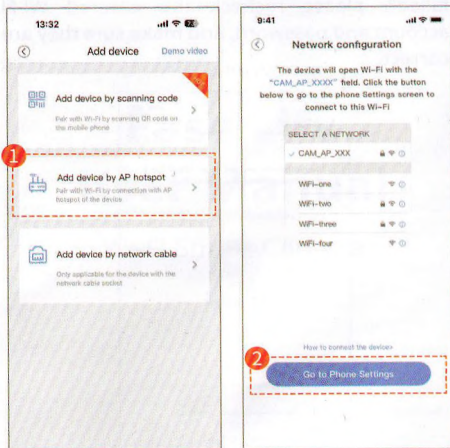

Note: During the process of adding device, please allow all permission requests, otherwise the process may fail

Add Device By AP Hotspot

1. When the phone is connected to the hotspot of the device, then back to Ease Life
2. On phones with iOS 14 and above, **BE SURE** to select "Allow" in the following dialog
3. Enter your home Wi-Fi account and password correctly

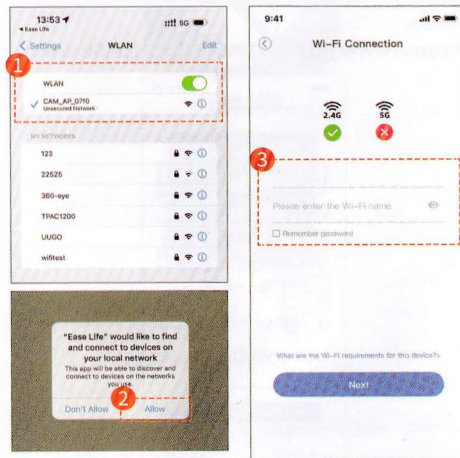


Add Device By AP Hotspot

1. Please wait patiently for 1~2 minutes, the device will connect to the network and bind to your account
2. If the device prompts "Network connection failed", please recheck the entered Wi-Fi account and password, and make sure they are correct



Add Device By Scanning Code


1. Choose "Add device by scanning code"
2. Enter your Wi-Fi account and password, and choose to connect to 2.4G or 5G WiFi signal according to the device model

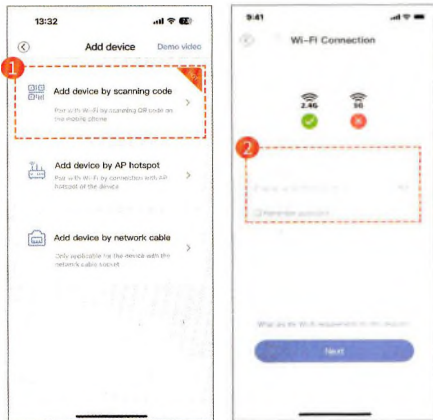

Note: Recommend to connect to a 2.4G Wi-Fi signal


Add Device By Scanning Code

1. Place the QR code on the phone screen 4-12 inches in front of the device, and move it back and forth slowly
2. When the device scans the QR code on the phone, the device will make a "beep beep" sound
3. If the scan fails for a long time, please visit the following address to view the demonstration video:
<https://www.youtube.com/@EaseLifeSecurity>

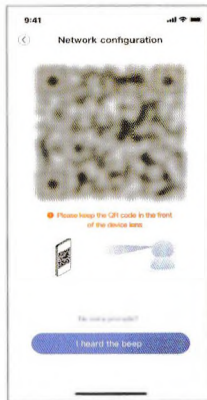


Add Device By Scanning Code

1. Please wait patiently for 1~2 minutes, the device will connect to the network and bind to your account
2. If the device prompts "Network connection failed", please recheck the entered Wi-Fi account and password, and make sure they are correct

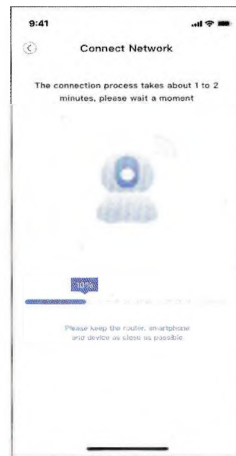

Features

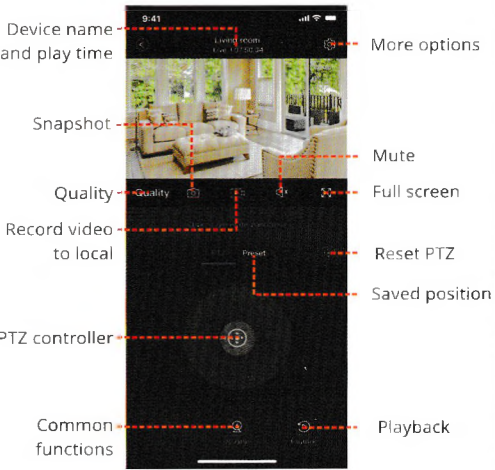

FAQs

1. When adding a device, the device prompts "Network connection failed"

Make sure the entered Wi-Fi name and password are correct. Some devices only support 2.4G Wi-Fi network and do not support 5G signal. Please contact the supplier to confirm.

2. Device often appears offline

Replace a power adaptor, and place the device close to the router. It is recommended that there should be no solid walls, metal door frames, etc. between the two, so as not to affect the network signal strength.

3. A memory card is inserted into the device but can be recognized

The device supports a memory card up to 128GB. Put the memory card on the computer and format it into FAT32, and then insert the memory card into the device before power on.

Notes

1. Please cut the power off when inserting/removing your SD card to ensure it can be recognized.
2. To improve the success rate of scanning QR code, please make sure there is no dust on the lens, adjust the smartphone screen brightness to high, tap the QR code to enlarge it, adjust the distance between the lens and screen, the optimal distance is 4-12 inches.
3. Do not use the device in any extreme weather environments such as extremely high, low temperatures, direct strong sunlight, or heavy rain for long periods of time. The suitable temperature for the product and accessories is -20 °C to 60 °C.
4. If you use a third-party charger, the recommended output voltage/current of the adaptor is DC 5V/2A.