

Quick Installation Guide

LED Explanation

Icon	Indication	Status
	POWER LED	NO: The device is power on OFF: The Device is not receiving electrical power
	WLAN LED	Wireless signal
	WPS LED	Flashing: WPS connection is established or WPS signal of another device is expected NO: The LAN port is connect OFF: The LAN port is disconnected Flashing: Transferring data to/from a network device
	LAN LED	

Button Explanation

WPS Button: If your host router supports WPS function, you can press the WPS button and then press the WPS button of the WPS button of the WIFI Repeater to establish a secure connection between the host router and the WIFI Repeater.

Reset Button: This button is used to restore The Repeater's factory default settings.

With the repeater powered on, use a pin to press and hold the Reset button for about 8 seconds.

LAN Port: One 10/100Mbps RJ45 Ethernet port is used to connect an Ethernet-enabled device to a Wi-Fi network, such as Internet TV, DVR, Gaming console and so on. Please note that this port cannot be connected to a router.

REV.2.0

Quick Installation

Working mode Diagram

Note: If you need to connect the network cable, please connect the network cable after the configuration is completed.

Repeater Mode: As a wireless signal extender

A. Extend your Wi-Fi signal without using any cables to reduce wiring troubles.




B. Extend your Wi-Fi signal with a cable, connect your device and extender stably.



AP Mode: As a wired signal extender (access point)

Get better WiFi speed by connecting the router and the extender with network cable in the poor WiFi signal area.




— 1 —

Quick Installation Guide

When the machine work normally, use the mobile phone to search and connect to Repeater-xxxxxx

(xxxx is the last 6 numbers of the repeater MAC address)


Note: If the mobile phone does not automatically jump to setting page after connecting, please click "forget" the wifi name that has been connected on the mobile in wifi manage, turn off the wifi and then reopen the wifi to search it, or input "192.168.11.1".

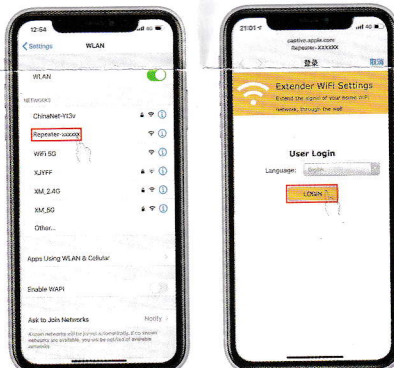

— 2 —

Wi-Fi Repeater mode setup



Step1: Click repeater mode to enter the network search page.

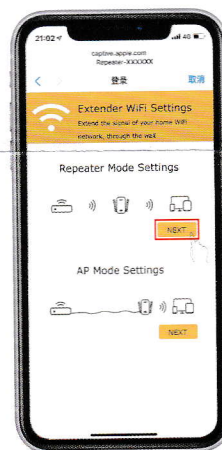

— 3 —

Step2: Select the wireless signal you want to expand, if it is a hidden network, you need to add it manually.


Step3: Enter your router connection password and click "NEXT".
If you don't want the same name as your router, please choose and input the new name.

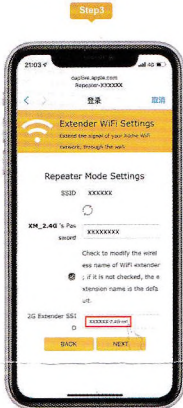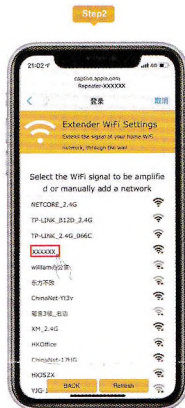

Step4: Click the "Finish" button to complete the relay mode configuration

(The extended WiFi's password is the same as the routers' by default)

Step5: Complete Repeater Mode setting.

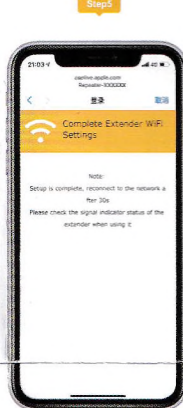


— 4 —

— 5 —

AP mode Setting

Step2: Set the wireless name and password with more than 8 digits (the wireless name and password can be set according to personal preference).



Step1: Click to Select "AP" mode to enter the setting page.

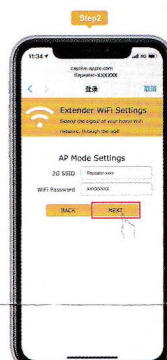

— 6 —

Step3: Click the "Finish" button to complete the AP mode configuration.

Step4: Complete AP mode setting.

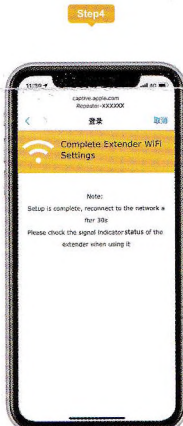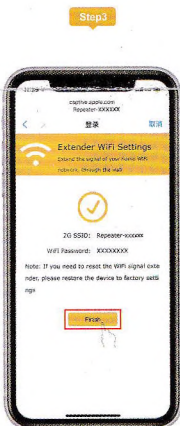

— 7 —

FAQ (Frequently Asked Questions)

Q1: What should I do if I cannot access the Repeater's web management page?

- A1: Make sure your computer is connected to the extended network.
- A2: Make sure your computer is set to obtain an IP address automatically.
- A3: If the Repeater has connected to the router, you should go to your router's DHCP client list to obtain the Repeater's current IP address.
- A4: Reset the Repeater.

Q2: Why does the wireless transmission rate speed down, when the wireless signal is stronger after repeated by the Repeater?

- A1: In compliance with the wireless transmission protocol, all the Repeater devices are set to work in half-duplex instead of full-duplex mode. In other words, the Repeater has to process one-way communication between your root Wireless router (or AP) and the terminal clients; so the transmission time will be double-increased, while the speed will be decreased. Recommends that you connect to the extender when your home network connection is poor, or when you want a larger wireless coverage to eliminate "dead zones".

Q3: Why the devices connected to the Repeater cannot get an IP address from the Repeater and cannot access the Internet?

- A1: Maybe you enabled a wireless MAC filter, wireless access control, or access control list (ACL) on your router. To solve this problem, please log into your router and disable the MAC filter, wireless access control or ACL.
- A2: Maybe the Repeater has not been successfully connected to your router, please reset the Repeater and Reconfiguration.
- A3: Maybe the IP address of the router is occupied or the wireless device connected by the router has reached the limit. please reboot your router, then reset the Repeater and Reconfiguration.

— 8 —